



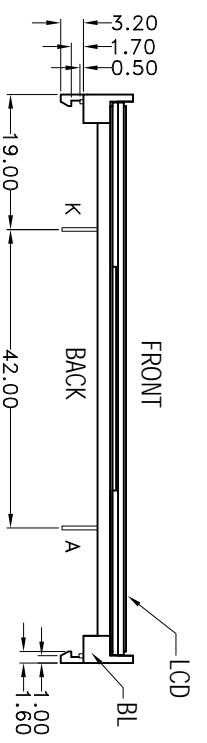
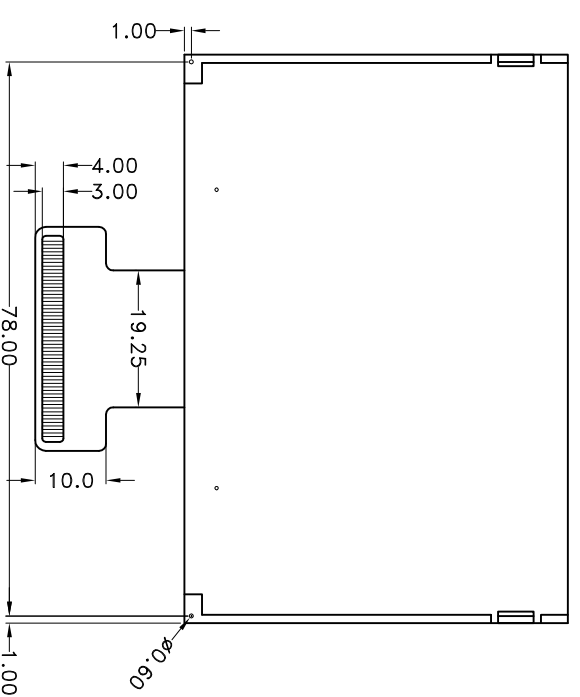
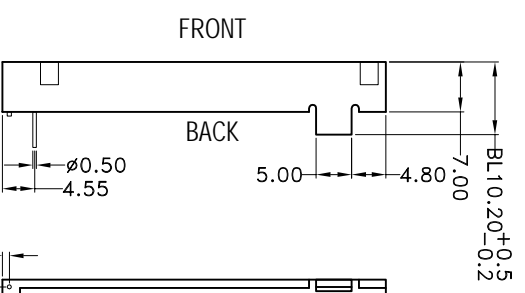


2

3

4

Terminal No.	Pin Name
1	/CSI
2	/RES
3	A0
4	WR
5	RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	C3+
18	C1-
19	C1+
20	C2+
21	C2-
22	V4
23	V3
24	V2
25	V1
26	V0
27	C86
28	PS

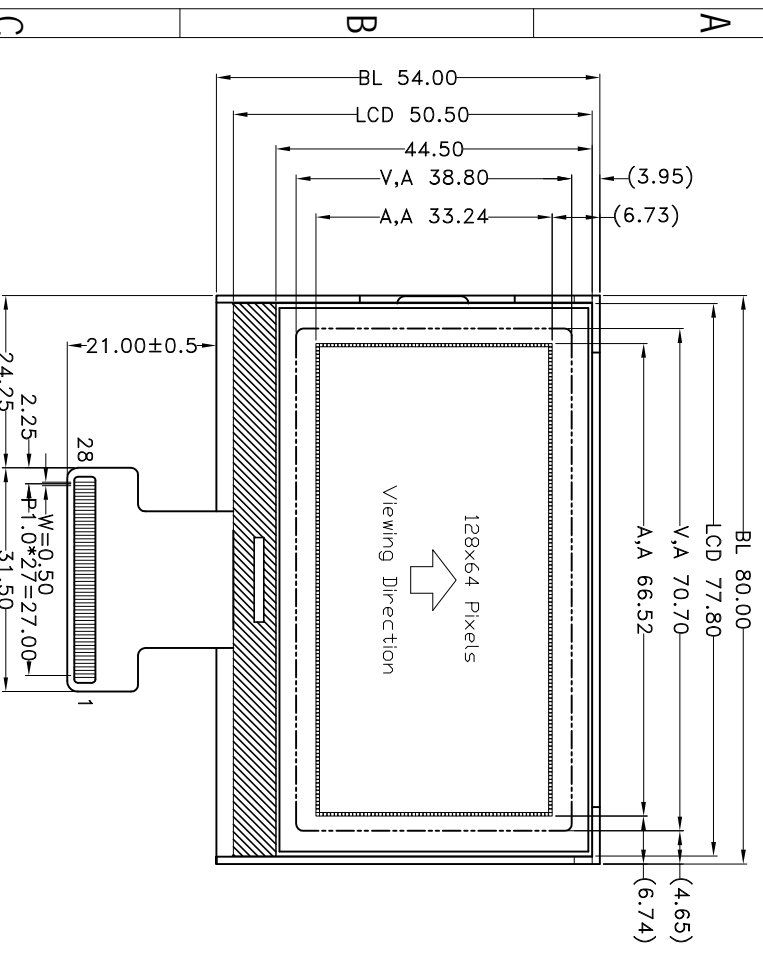

*1. LCD Display Type		FSTN, Transflective, Positive	
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/64Duty, 1/9Bias	*7. Driver IC	ST7565P
*4. Operating Voltage	3.3V	*8. Backlight	WHITE Vf=3.3v If=60mA
*5. Operating Temp	-20°C~70°C	*9. RDHS	

HOT DISPLAY

Dwg Title:		HTG12864-103-31V-28K10-V03	
EDC No:		Ver:	
Scale	Unit	Tol.	Ver:
1:1	mm	±0.3	A/0
Drawn		Checked	Date:
			2018-07-23

2

3

4